

Rasp grinder

DESCRIPTION


- The unit is delivered with instructions for use and technical documentation.
- Centrifugal-rasp grinder.
- The rasp is mounted on a painted steel support.
- Direct coupling of the motor –
P = 2.2 kW .
- Body of the crusher, grate, roast and blades: stainless 316 L (food quality).
- Delivered with a high-density polyethylene tank (food quality) for the collection of ground fruits - volume: 100 L .
- Maximum capacity: 2000 kg/h.
- The fruit feeding hopper is inclined and is made from painted steel.



GPA BR1

USE AND SAFETY

- Easily dismantled
- Easily moved (thanks to its compactness and mobility)
- Easily cleaned
- Splash guard and contact security for the current cutting
- Delivered with an IP55 switch box, equipped with an emergency stop

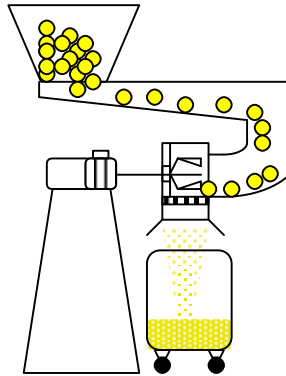

ELECTRICITY

220-380 V – three-phase - 50-60 Hz

DIMENSIONS

1000 x 1300 x 1560 mm