

STUDY OF A WIND TURBINE - SIMULATION WITH A WIND TUNNEL



Experimental capabilities

- Identification of the components of a power generating installation by wind turbine
- Electrical connection of the different elements of chain production (wind turbine, controller, battery, inverter, production ...)
- Commissioning and use of a wind turbine installation
- Understanding of the operation of an wind turbine
- Study of the relation between wind speed and electric power produced
- Implementation of the system and use of the speed variation of wind simulation fan.
- System operation analysis (calculations of electrical power, component efficiencies)

Operating principle

The ERL200 bench allows the complete study of a production chain of electrical energy by wind turbine. The unit includes a ventilation tunnel with axial fan in which is installed a wind turbine. The fan is positioned downstream of the wind turbine in order to reduce aerodynamic disturbances. The control and production system is an independent module. It includes the general electrical panel, batteries, the production chain components (controller, inverter) and the dissipation elements (lamps, fan).


Students will initially be familiar with the different elements of the installation and then electrically connect all the components. After validation by the teacher, they can activate the system and measure the operating parameters with the instrumentation in place. They will then have to vary the conditions (wind speed) and calculate the power generated and the different efficiencies.

The bench is autonomous and requires a power supply 400VAC three phase + neutral. The modules are mounted on screwed chassis of anodized aluminum profile (dimensions 45x45mm) equipped with directional castors with brake (diameter 100mm).

The robust design of this equipment makes it perfectly suited for use in schools

Illustrations

Technical specifications

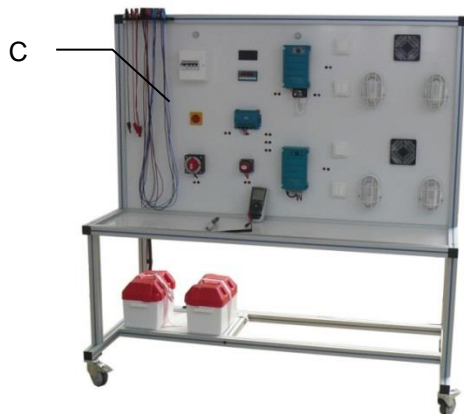

The bench includes at least the following:

A wind tunnel including a fan (A) with variable speed with control by a potentiometer and a wind turbine (B) (24VDC-200W). The tunnel is made of transparent material in order to visualize the operation of the wind turbine. The frame is equipped with 6 directional casters with brakes.

A the production and storage module of energy (C) includes :

- the supply electrical box of the machine including standard safety devices
- a quick connector Harting type for electrical connection between the tunnel and this module
- two batteries in series to store energy (24VDC / 55Ah) with protective box
- a charge controller
- an inverter (24VDC / 230VAC-500W)
- a charger for the battery
- a load area 24VDC including two lamps and a fan
- a load area 230VAC including two lamps and a fan

So that the system is electrically connected by the students in complete safety, each electrical terminal of each component is reduced on the front panel on a dual socket sink. The dual sink cords needed to connect are provided.

The bench is supplied with the following instrumentation:

- an air speed sensor in the wind tunnel (simulated wind speed)
- a portable multimeter with AC/DC clamp ammeter to measure the voltages and currents at the terminals of various elements

Services required

Documentation

- Power supply : 400 Vac – 50 Hz – 32 A
- Power supply type: 3 phase(s) + Neutral + Earth.
- Dimensions: (LxWxH mm):
Wind tunnel : 3000 x 1200 x 1800
Production module : 1760 x 770 x 1820

- User's manual
- Technical documentation of the components
- Lab exercises
- Certificate of conformity CE

Note : if the equipment installation is operated by our staff, all supplies and exhaust connections required must stand at less than 2m from the machine